



HOGG & DAVIS TENSIONER

OLT 38B Overhead Line Bull-Wheel Tensioner

PRODUCT DESCRIPTION

The OLT 38B Overhead Line Tensioner is designed to install single conductor. The bullwheels are offset as per IEEE specifications to prevent unnecessary twisting of the conductor during installation.

The bullwheels are outfitted with replaceable diameter molded segments. Molding of the segments in this manor eliminates the gaps between segments and creates a smooth cable surface. 24" disc brakes, with centralized braking controls, allow for precise tensioning of the conductor.

The reel cargo area allows for the carrying of a reel 90" in diameter and 52" wide at a maximum weight of 8,000lb. A manually actuated bronze overspin brake is also included as well as a urethane roller fairlead for guiding the cable to the bullwheels.

KEY FEATURES


- Multi Groove Bullwheels
- Rated at: 3000lb
- Rear Jackstands: Manual
- Unit Length: 17' 4", Width: 96"
- Tandem Leaf Spring Axles
- Electric Brakes
- 14,000lb GAWR
- 235/85/16 14 ply tires
- Bullwheel Diameter (with lining): 38"
- Lining: (3) Urethane Diameter Molded
- Groove Diameter: 1.5"
- Braking: (2) Hydraulic Discs
- Brake Material: Bronze
- Brake Diameter: 24"
- Braking Mechanism: Hydraulic
- Actuator: Single Screw Rotary Adjustment

REEL CARRIER FEATURES

- Reel Capacity: 8,000lb
- Maximum Reel Width: 56"
- Maximum Reel Diameter: 90"
- Anti-Overspin Brake: 16"



OLT 38B

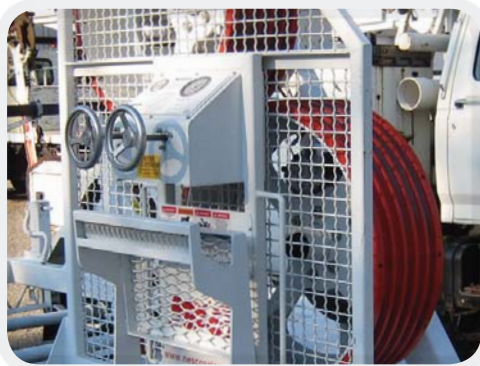

Control Panel



Rear View



3112 E State Rd 124
Bluffton, IN 46714
USA

T. 1-800-252-0043
P. 1-260-824-6340
F. 1-260-824-6350

nescosales.com
www.nescosales.com
An American Company

Effective Date

08/11/08