




MANITEX

35124C

FEATURES

- 35 Ton (31.8 mton) Capacity
- 5-Section 124' (37.8 m) Proportional Boom
- 4-Section 100' (30.5 m) Proportional Boom
- 3-Section 77' (23.5 m) Proportional Boom
- 1 and 2-Section 30' 6" (9,3 m) to 55' (16.8 m) Jib
- 165' 11" (50.6 m) Maximum Tip Height
- 22', 1.25" (6.7 m) Out-and-Down Outriggers at Full Extension
- Intermediate and Fully Extended Outrigger Charts are Standard
- First Up for Optional Front Stabilizer Auto Retract
- 2-Speed Planetary Hoist with Grooved Drum and Negative Draft Flange
- Load Moment Indicator with Digital Display, CAN Bus, Overload Shutdown and Internal Boom Length Cable
- Radio ATB
- Rugged, Weatherproof Electrical System with Circuit Status LEDs
- Removable Boom Rest
- System Pressure Gauge
- Clamp-On Mounting
- Aeroquip STC (Snap to Connect) Hydraulic Fittings
- Manitex UPTIME Comprehensive Support

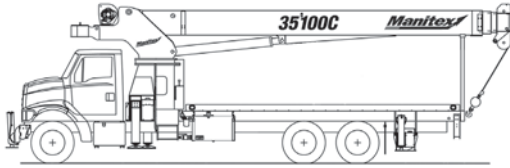

35124C on Sterling LT9500



Rear View

FULL EXTENDED OUTRIGGER CONFIGURATION

		MAIN BOOM LOAD RATINGS IN LBS								JIB LOAD RATINGS IN LBS								
		LMI CODE #1								LMI CODE #2								
OPERATING HEIGHT	LOADED BOOM ANGLE BOOM LENGTH AND MARKER									OPERATING HEIGHT	BOOM ANGLE	31 FT JIB FOR ALL BOOM LENGTHS SEE WARNING NOTE 4						
		31 FT	A	B	C	D	10	12	15									
		81	76	72	68	65							60	53	47	40	35	30
6		81	70000															
8		76	53390															
10		72	45380															
12		68	39420	79	25000													
15		61	33110	76	25000	81	21500											
20		49	23710	71	22870	78	19700	81	14500									
25		34	17680	65	18280	74	17420	79	13500	81	8450	25						
30				60	14150	70	14320	76	12820	79	8150	30	81					4000
35				53	11080	66	11270	73	11370	76	7800	35	79					3850
40				47	8590	62	8770	69	8870	74	7280	40	77					3700
45				39	6780	57	6960	66	7050	72	6780	45	75					3550
50				29	5400	52	5580	63	5660	69	5710	50	73					3400
55				13	4320	47	4490	59	4570	66	4620	55	71					3250
60						42	3620	56	3700	64	3740	60	69					3080
65							36	2890	52	2970	61	3020	65	67				2910
70							28	2290	48	2370	58	2410	70	66				2740
75							18	1770	44	1850	55	1900	75	64				2220
80									39	1410	52	1450	80	62				1770
85									34	1030	49	1070	85	60				1390
90									28	690	45	730	90	57				1050
95													95	55				750
		450 LBS	240 LBS	180 LBS	140 LBS	120 LBS	DEDUCTIONS FOR STOW POSITION											



3112 E State Rd 124
Bluffton, IN 46714
USA

T. 1-800-252-0043
P. 1-260-824-6340
F. 1-260-824-6350

nescosales.com
www.nescosales.com
An American Company

Effective Date
08/11/08