




TEREX COMMANDER

4000 Series Digger Derrick

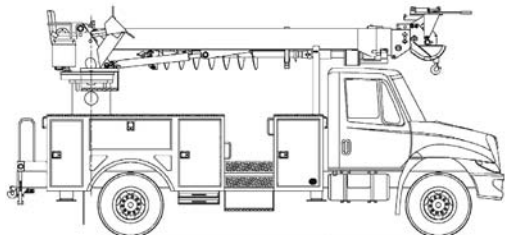

PRODUCT DESCRIPTION

Terex Telelect digger derricks have over a 55-year track record for being the best in quality, design, and performance.

SPECIFICATIONS

- Sheave heights from 41.9 - 50.4 ft. (12.8 - 15.4 m)
- Winch capacity up to 24,510 lbs. (11,117 kg)
- Capacity @ 10 ft. radius up to 11,200 lbs. (4,948 kg)

KEY FEATURES

- 100 Degrees of Boom Travel (+80 to -20)
- 50 Gallon Hydraulic Oil Reservoir
- Boom Interlock
- Box Fabricated Steel Lower Boom and Intermediate
- Continuous Unrestricted Rotation
- Custom Made Zoned Load Chart
- Dual Handle Rack Controls
- Fiberglass Hydraulic Upper Boom
- Full Pressure Hydraulic Controls
- Meets or Exceeds ANSI A10.31
- Open Center Hydraulic System
- Outrigger Moving Alarm
- Self-Aligning Swivel Ball Bushings
- Steel Hydraulic Intermediate
- Truck Angle Indicator
- Transferable Pole Buddy
- 15,000 lb. Turntable Winch

OPTIONS

- Fiberglass Personnel Platform
- Full Pressure Upper Controls
- Hydraulic Overload Protection (HOP)
- Material Handling Jibs
- Pole Guide
- Various Types of Outriggers
- Auger Storage on Right Side
- Start/Stop and Throttle Advance at Top Controls
- Boom Tip Winch
- Command Post Operator Controls
- Hydraulic Tool Outlets at Upper Controls
- Manual Fiberglass 4th Section (Adds 4 Feet)
- Multi-Part Line Components
- Planetary Slip Brake Rotation
- Radio Remote Controls
- Single Stick "T" Control
- Various Types of Controls
- Various Types of Bodies



4047 on Flatbed Ford



4047 on Utility Body IH



4047 on Camoplast GT2000HY



3112 E State Rd 124
Bluffton, IN 46714
USA

T. 1-800-252-0043
P. 1-260-824-6340
F. 1-260-824-6350

nescosales.com
www.nescosales.com
An American Company

Effective Date

07/18/08