



TEREX COMMANDER

6000 Series Digger Derrick

PRODUCT DESCRIPTION

Terex Telelect digger derricks have over a 55-year track record for being the best in quality, design, and performance. The Commander 6000 Digger Derrick was recently upgraded for an 18% lift capacity increase as well as improved maintenance access.

SPECIFICATIONS


- Sheave height 54.1 - 69.8 ft (16.5 - 21.3 m)
- Winch capacity up to 36,000 lb (16,330 kg)
- Capacity @ 10 ft radius (3.0 m) up to 19,100 lb (8,664 kg)

KEY FEATURES

- 100 Degrees of Boom Travel (+80 to -20)
- 50 Gallon Hydraulic Oil Reservoir
- Boom Angle Indicator
- Boom Interlock
- Box Fabricated Steel Lower Boom and Intermediate
- Continuous Unrestricted Planetary Gear Rotation
- Custom Made Zoned Load Chart
- Dual Handle Rack Controls
- Dual Lift Cylinders
- Fiberglass Hydraulic Upper Boom
- Full Pressure Hydraulic Controls
- Meets or Exceeds ANSI A10.31
- Open Center Hydraulic System
- Planetary Winch
- Steel Hydraulic Intermediate
- Transferable Pole Buddy
- 15,000 lb Turntable Winch

OPTIONS

- Diggers/Augers
- Fiberglass Personnel Platform
- Full Pressure Upper Controls
- Hydraulic Overload Protection (HOP)
- Start/Stop and Throttle Advance at Top Controls
- Material Handling Jibs
- Pole Puller
- Pole Guide
- Various Types of Outriggers
- Auger Storage on Right Side
- Boom Tip Winch
- Command Post Operator Controls
- Hydraulic Tool Outlets at Upper Controls
- Manual Fiberglass 4th Section (Adds 4 Feet)
- Multi-Part Line Components
- Radio Remote Controls
- Single Stick "T" Control
- Various Types of Controls

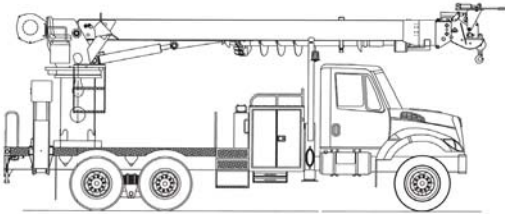

6060 on Sterling Acterra



6060 on FL M2106V 6X6



6060 on Camoplast GT3000HY



3112 E State Rd 124
Bluffton, IN 46714
USA

T. 1-800-252-0043
P. 1-260-824-6340
F. 1-260-824-6350

nescosales.com
www.nescosales.com
An American Company

Effective Date

08/18/08