



TEREX HI-RANGER

FC55

SPECIFICATIONS


- Working Height: 60.6 ft (18.5 m)
- Horizontal Reach: 37.6 ft (11.5 m)
- Platform Capacity: 700 lb (318 kg)

KEY FEATURES

- Two-Person End Mount 24"x48"x14" Platform
- 700 lbs. Platform Capacity
- Two Safety Harnesses with Attached Lanyard
- Continuous Unrestricted Rotation
- Control-Plus "3-D" Single Stick Control at Platform
- Automatic Two-Speed Throttle Control
- Pressure Compensated, Variable Volume, Closed-Center Hydraulic System
- Positive Leveling System Utilizing Fiberglass Rods and Aircraft-Type Cables
- Category "C" Rating per ANSI A92.2
- Hydraulic/Mechanical Boom Compensation System
- 32 Gallon Hydraulic Oil Reservoir
- Boom Interlock
- Moving Outrigger Alarm
- 102° Of Lower Boom Articulation
- 69° Of Upper Boom Articulation (Above Horizontal)

OPTIONS

- Engine Stop/Start at Platform
- Category "A" Or "B" Rating Per ANSI A92.2
- Hydraulic Tool Outlets at Platform
- Gin Pole Socket*
- Mechanical Side Tilting Platform*
- Platform Covers and Liners*
- Auxiliary Power
- Boom/Boom Stow Interlock
- 10' Longitudinal Hydraulic Lift
- Various Types of Outriggers
- Platform Rotator*
- Upper Boom Overload Warning Alarm
- Boom Storage Warning Light
- Outrigger Sag Light
- Truck Grounding Cable & Clamp

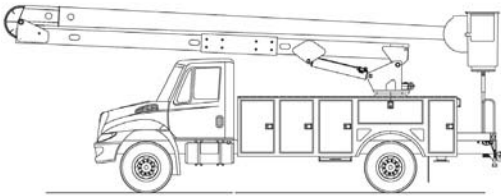

FC55 on Peterbilt 335



5FC55 on IH 4300



5FC55 on Ford F750



3112 E State Rd 124
Bluffton, IN 46714
USA

T. 1-800-252-0043
P. 1-260-824-6340
F. 1-260-824-6350

nescosales@nescosales.com
www.nescosales.com
An American Company

Effective Date

08/18/08