




# TEREX HI-RANGER

**LT40**

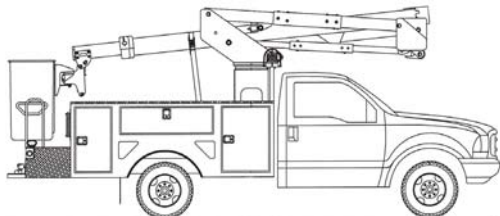

## SPECIFICATIONS

- Working Height: 45.3 ft (13.8 m)
- Horizontal Reach: 26.6 ft (8.1 m)
- Platform Capacity: 350 lbs. (159.0 kg)

## KEY FEATURES

- End Mounted 24 x 24 x 42 Inch One Person Platform
- Hydraulic Master Slave Platform Leveling
- Full Pressure Controls on Side of Platform
- "3-D" One Hand Control at Platform
- Open Center Hydraulic System
- Category "C" Rating Per ANSI A92.2
- Steel Main Boom with Fiberglass Insert
- Fiberglass Second Section Boom
- Fiberglass Lift Boom Insert
- Lower Controls above Rotation
- Safety Harness with Attached Lanyard
- Padded Boom Rest
- Continuous Rotation
- Platform Tilt Control at Lower Controls
- Lower Controls Override Upper Controls
- 20 Gallon Hydraulic Tank Integral with Pedestal
- Sight Gauge for Hydraulic Tank

## OPTIONS

- Platform Rotator for End Mount Boom Tip (300 lb Platform Capacity)
- Vinyl Platform Covers
- Non-Continuous Rotation
- Two Speed Throttle Control
- Hydraulic Tool Outlets
- Auxiliary Power and Auxiliary Lowering System
- Stop/Start at Lower Controls
- Stop/Start at Platform
- A-Frame Outriggers
- Moving Outrigger Alarm
- Boom Interlock
- Truck Grounding Cable and Clamp
- 20 Gallon Remote Oil Reservoir
- Boom/Boom Stow Interlock
- Boom Overstow Protection
- Outrigger Sag Light



LT40P on Ford 4x4



LT40P on Dodge



LT40P on Sterling Bullet



3112 E State Rd 124  
Bluffton, IN 46714  
USA

T. 1-800-252-0043  
P. 1-260-824-6340  
F. 1-260-824-6350

nescosales@nescosales.com  
www.nescosales.com  
An American Company

Effective Date

08/17/08