




# TEREX HI-RANGER

**TC55**

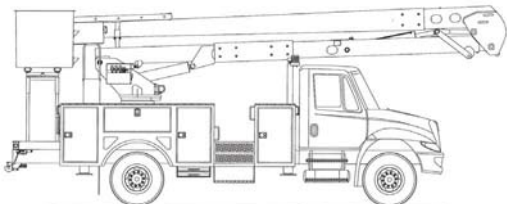

## SPECIFICATIONS

- Working Height: 60.0 ft (18.3 m)
- Horizontal Reach: 38.3 ft (11.7 m)
- Platform Capacity: 700 lb (318 kg)

## KEY FEATURES

- Single Side-Mount Platform 24" x 30" x 42" (Std on TC52 & TC55 ft)
- Two Person End-Mount Platform 24" x 48" x 42"
- Safety Harness with Attached Lanyard
- Power Assist Control System w/Automatic Throttle
- Control-Plus "3-D" Single Stick Control at Platform
- Individual Lever Lower Controls
- Hydraulic Platform Tilt at Lower/Upper Controls
- Master/Slave Platform Leveling System
- 100° Of Lower Boom Articulation (102° Lower Boom Articulation on TC60 & TC65)
- 163° Of Upper Boom Articulation
- Compensated Boom Design
- Continuous Unrestricted Worm Gear Rotation
- Category "C" Rating Per ANSI A92.2
- Pilot-Operated Closed-Center Hydraulic System
- 35 Gallon Hydraulic Oil Reservoir
- Boom Interlock
- Moving Outrigger Alarm

## OPTIONS

- Two Person Side or End Mount Platform
- 24" Platform Lifter
- Hydraulic Jib Extension Underload
- Single Wire / Multi-Phase Attachments
- Hydraulic Tool Outlets at Platform
- Platform Covers and Liners
- Overcenter, Dual Platform Option
- Hydraulic Platform Rotators (180° End Mt, 90° Side Mt)
- Engine Stop/Start at Platform
- Auxiliary Lowering or Auxiliary Power Systems
- Category "B" Rating Per ANSI A92.2
- Boom/Boom Stow Interlock
- Boom Storage Warning Light
- Boom Overstow Protection
- Various Types of Outriggers
- Lower Boom Lifting Eye
- Hydraulic Articulating Jib/Winch, 1000 lb (454 kg)
- Hydraulic Articulating Jib/Winch, 1500 lb (680 kg)
- Truck Grounding Cable and Clamp
- Hydraulic Lifts: 13 ft, 15 ft, & 25 ft
- Automatic Boom Latch
- Various Hydraulic Pumps



5TC55 on IH 4300



5TC55-MH on Ford F750



5TC55-MH on Freightliner FL70



3112 E State Rd 124  
Bluffton, IN 46714  
USA

T. 1-800-252-0043  
P. 1-260-824-6340  
F. 1-260-824-6350

nescosales.com  
www.nescosales.com  
An American Company

Effective Date

08/17/08