



TEREX HI-RANGER

TL38P

SPECIFICATIONS


- Working Height: 43.3 ft (13.2 m)
- Horizontal Reach: 27.0 ft (8.2 m)
- Platform Capacity: 350 lb (159.0 kg)

KEY FEATURES

- End Mounted 24 x 24 x 42 in One Person Platform
- Hydraulic Master Slave Platform Leveling
- Full Pressure Controls on Side of Platform
- "3-D" One Hand Control at Platform
- Open Center Hydraulic System
- Category "C" Rating per ANSI A92.2
- Steel Main Boom with Fiberglass Insert
- Fiberglass Second Section Boom
- Fiberglass Lift Boom Insert
- Lower Controls Above Rotation
- Safety Harness With Attached Lanyard
- Padded Boom Rest
- Continuous Rotation
- Platform Tilt Control at Lower Controls
- Lower Controls Override Upper Controls
- 20 Gallon Hydraulic Tank Integral with Pedestal
- Sight Gauge for Hydraulic Tank

OPTIONS

- Platform Rotator For End Mount Boom Tip (300 lb Platform Capacity)
- Vinyl Platform Covers
- Non-Continuous Rotation
- Two Speed Throttle Control
- Hydraulic Tool Outlets
- Auxiliary Power and Auxiliary Lowering System
- Stop/Start at Lower Controls
- Stop/Start at Platform
- A-Frame Outriggers
- Moving Outrigger Alarm
- Boom Interlock
- Truck Grounding Cable and Clamp
- 20 Gallon Remote Oil Reservoir
- Boom/Boom Stow Interlock
- Boom Overstow Protection
- Outrigger Sag Light

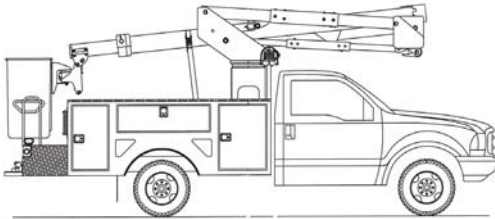

TL38P on Ford 4x4



Rear View



3112 E State Rd 124
Bluffton, IN 46714
USA

T. 1-800-252-0043
P. 1-260-824-6340
F. 1-260-824-6350

nescosales.com
www.nescosales.com
An American Company

Effective Date
07/22/08