



TEREX TELE GENERAL

General Series Digger Derrick

PRODUCT DESCRIPTION

Terex Telelect digger derricks have over a 55-year track record for being the best in quality, design, and performance.

SPECIFICATIONS


- Sheave Height 53.3 - 95.6 ft (16.2 - 29.1 m)
- Winch Capacity up to 50,000 lb (22,680 kg)
- Capacity @ 10 ft Radius (3.0 m) up to 22,600 lb (10,251kg)

KEY FEATURES

- 100 Degrees of Boom Travel (+80 to -20)
- 60 Gallon Hydraulic Oil Reservoir
- Boom Angle Indicator
- Boom Interlock
- Box Fabricated Steel Lower Boom and Intermediate
- Continuous Unrestricted Planetary Gear Rotation
- Custom Made Zoned Load Chart
- Dual Handle Rack Controls
- Fiberglass Hydraulic Upper Boom
- Full Pressure Hydraulic Controls
- Meets or Exceeds ANSI A10.31
- Open Center Hydraulic System
- Outrigger Moving Alarm
- Planetary Winch
- Self-Aligning Swivel Ball Bushings
- Steel Hydraulic Intermediate
- Transferable Pole Buddy
- 15,000 lb. Turntable Winch

OPTIONS

- Diggers/Augers
- Fiberglass Personnel Platform
- Full Pressure Upper Controls
- Hydraulic Overload Protection (HOP)
- Material Handling Jibs
- Pole Puller
- Pole Guide
- Pole Guide Interlock
- Start/Stop and Throttle Advance at Top Controls
- Steel Upper 3rd & 4th (Not Available w/Transferable Pole Buddy)
- Various Types of Outriggers
- Auger Storage on Right Side
- Command Post Operator Controls
- Hydraulic Tool Outlets at Upper Controls
- Multi-Part Line Components
- Radio Remote Controls
- Single Stick "T" Control
- Various Types of Controls

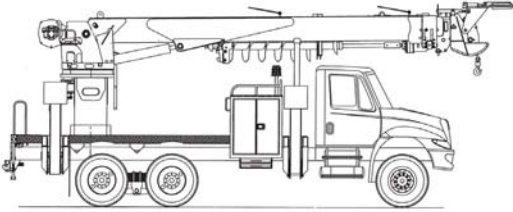

General on IH 7400 6x6



General on Camoplast GT3000HY



3112 E State Rd 124
Bluffton, IN 46714
USA

T. 1-800-252-0043
P. 1-260-824-6340
F. 1-260-824-6350

nescosales.com
www.nescosales.com
An American Company

Effective Date

07/17/08